



A=1.27\*No. of Positions/2+0.4±0.30  
 B=1.27\*No. of Contacts/2-1.27±0.20

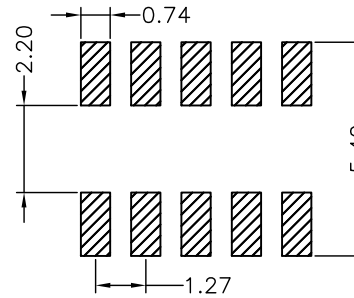

P.C.B LAYOUT



P/N LEGEND

A12716	HV	S	2XNP	N	6	B	G1	N	O2	L
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪

① Series No.  
 ② Connector type: HV=Housing Vertical  
 ③ S=SMT  
 ④ No. of circuits  
 ⑤ N=Halogen Free  
 ⑥ Material: 6=Nylon 6T, UL94V-0  
 ⑦ Color: B=Black  
 ⑧ Plating code for contacts: G1=Gold-Flash  
 ⑨ Plating code: N=Non-plating  
 ⑩ Option code: O2=O2 Type  
 ⑪ Packing code: L=Tape Reel(With Cap or Mylar)

SPECIFICATIONS

Current Rating: 1A AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Pin Material: Phosphor Bronze



燦達電子工業股份有限公司  
 JOINT TECH ELECTRONIC IND. CO., LTD.

UNIT: mm  
 SCALE: 1:1  
 SHEET: 1 of 1

DRAWN BY: 黃模有  
 2013.10.29  
 APPROVED BY: 張子波  
 2013.10.29

GENERAL TOLERANCE  
 X, X±0.25  
 X, XX0.15  
 X, XXX0.05

TITLE:  
 1.27mm PITCH  
 FEMALE SMT TYPE

A0	NEW RELEASE	2013.10.29	黃模有	X, X±0.25	ANGLE±	DRAW NO. : A12716HV-S-2XNP6BG1N02L	REV. A0
REV.	DESCRIPTION	DATE	NAME	X, XX0.15 X, XXX0.05			