

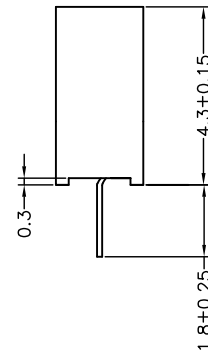


Assembly layout

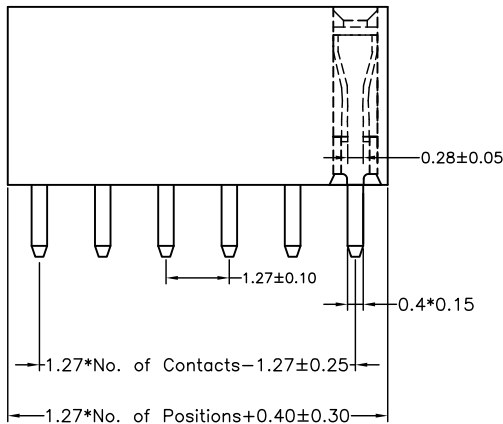

P.C.B LAYOUT








P/N LEGEND

A1271	HV-XP	N	6	B	GD	N	00	L	
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩
① Series No.	② Connector type: HV=Vertical Housing	③ No. of circuits	④ N=Halogen Free	⑤ Material: 6=Nylon 6T UL94V-0	⑥ Color: B=Black	⑦ Plating code for contacts: GD=Gold-Plated	⑧ Plating code: N=Non-plating	⑨ Option code: 00=Standard	⑩ Packing code: L=Tape Reel (With Cap or Mylar)

SPECIFICATIONS

Current Rating: 1A AC,DC
 Temperature Range: -25°C ~ +85°C
 Insulation Resistance: 1000MΩ Min.
 Pin Material: phosphor Bronze/Gold-Plated
 Material: Nylon 6T,UL94V-0

				燦達電子工業股份有限公司 JOINT TECH ELECTRONIC IND. CO., LTD.	
UNIT	SCALE	SHEET	TITLE:		
mm	1 : 1	1 of 2	1.27mm PITCH 180° WAFER		
DRAWN BY 黃模有 2013.11.06		APPROVED BY 張子波 2013.11.06			
GENERAL TOLERANCE					
A1	EN1311250410	2013.11.27	黃模有	X.X±0.25	ANGLE±
A0	NEW RELEASE	2013.11.06	黃模有	X.XX0.15	
REV.	DESCRIPTION	DATE	NAME	X.XXX0.05	
DRAW NO. : A1271HV-XP6BGDN00L					REV. A1

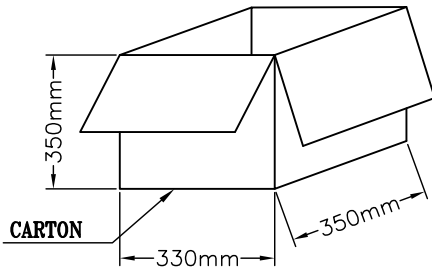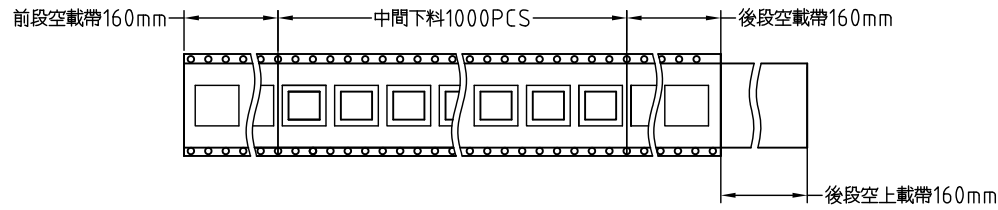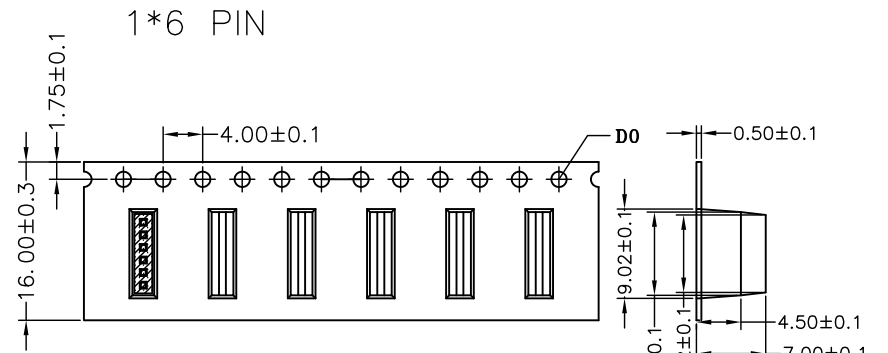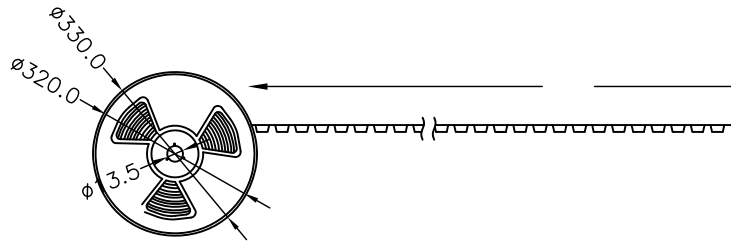

1. DIMENSION :



CARTON:

L=350mm, W=330mm, H=350mm

2. 1 QUANTITY

=16 REEL

=16000PCS

				 燦達電子工業股份有限公司 JOINT TECH ELECTRONIC IND. CO., LTD.			
				UNIT	SCALE	SHEET	TITLE: 1.27mm PITCH 180° WAFER
				mm	1 : 1	2 of 2	
				DRAWN BY 黃模有 2013.11.06	APPROVED BY 張子波 2013.11.06		
				GENERAL TOLERANCE			DRAW NO. : A1271HV-XP6BGDN00L
A1	ERI312050419	2013.12.05	黃模有	X. X±0.25	ANGLE±		
A0	NEW RELEASE	2013.11.06	黃模有	X. XX±0.15			
REV.	DESCRIPTION	DATE	NAME	X. XXX±0.05			

1 |

2 |

3 |

4 |