



P/N LEGEND

A2005	H-XP	N	O	X	NP	N	00	G	
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩

① Series No.  
 ② Connector type: H=Housing  
 ③ No. of circuits  
 ④ N=Halogen Free  
 ⑤ Material: O=Nylon 66-V0  
 ⑥ Color: B=Natural(Black); W=Natural(White);  
 ⑦ Plating code: NP=Non-plating  
 ⑧ Plating code: N=Non-plating  
 ⑨ Option code: 00=Standard  
 ⑩ Packing code: G=Bag

SPECIFICATIONS

Current Rating: 3A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 30mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage: 650V AC/minute  
 Material: Nylon 66,UL94V-0

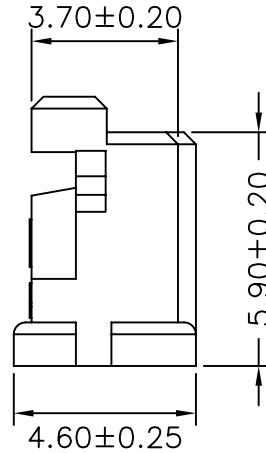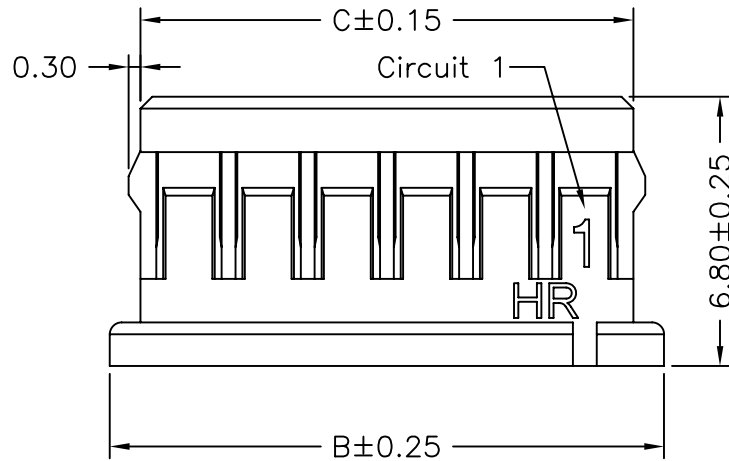

Circuit No.	Dimensions		
	A	B	C
02P	2.00	6.00	4.45
03P	4.00	8.00	6.45
04P	6.00	10.00	8.45
05P	8.00	12.00	10.45
06P	10.00	14.00	12.45
07P	12.00	16.00	14.45
08P	14.00	18.00	16.45
09P	16.00	20.00	18.45
10P	18.00	22.00	20.45
11P	20.00	24.00	22.45
12P	22.00	26.00	24.45
13P	24.00	28.00	26.45
14P	26.00	30.00	28.45
15P	28.00	32.00	30.45

				燦達電子工業股份有限公司 JOINT TECH ELECTRONIC IND. CO., LTD.			
UNIT		SCALE	SHEET		TITLE:		
mm		1 : 1	1 of 1		2.00mm PITCH HOUSING		
DRAWN BY		APPROVED BY		DRAW NO. : A2005H-XPNXXXXXXXXX			
陳敏		董正一					
2011.03.28		2011.03.28		REV. A1			
GENERAL TOLERANCE				ANGLE±			
A1	EN1109150412	2011.08.18	陳錦展	X.X±0.25			
A0	NEW RELEASE	2011.03.28	陳敏	X.XX±0.15			
REV.	DESCRIPTION	DATE	NAME	X.XXX±0.05			