


Ordering Information & Dimensions

PART NO.	Dimensions		PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B		A	B
A2016H-2X02P	2.00	4.20	A2016H-2X15P	28.00	30.20	A2016H-2X28P	54.00	56.20
A2016H-2X03P	4.00	6.20	A2016H-2X16P	30.00	32.20	A2016H-2X29P	56.00	58.20
A2016H-2X04P	6.00	8.20	A2016H-2X17P	32.00	34.20	A2016H-2X30P	58.00	60.20
A2016H-2X05P	8.00	10.20	A2016H-2X18P	34.00	36.20	A2016H-2X31P	60.00	62.20
A2016H-2X06P	10.00	12.20	A2016H-2X19P	36.00	38.20	A2016H-2X32P	62.00	64.20
A2016H-2X07P	12.00	14.20	A2016H-2X20P	38.00	40.20	A2016H-2X33P	64.00	66.20
A2016H-2X08P	14.00	16.20	A2016H-2X21P	40.00	42.20	A2016H-2X34P	66.00	68.20
A2016H-2X09P	16.00	18.20	A2016H-2X22P	42.00	44.20	A2016H-2X35P	68.00	70.20
A2016H-2X10P	18.00	20.20	A2016H-2X23P	44.00	46.20	A2016H-2X36P	70.00	72.20
A2016H-2X11P	20.00	22.20	A2016H-2X24P	46.00	48.20	A2016H-2X37P	72.00	74.20
A2016H-2X12P	22.00	24.20	A2016H-2X25P	48.00	50.20	A2016H-2X38P	74.00	76.20
A2016H-2X13P	24.00	26.20	A2016H-2X26P	50.00	52.20	A2016H-2X39P	76.00	78.20
A2016H-2X14P	26.00	28.20	A2016H-2X27P	52.00	54.20	A2016H-2X40P	78.00	80.20

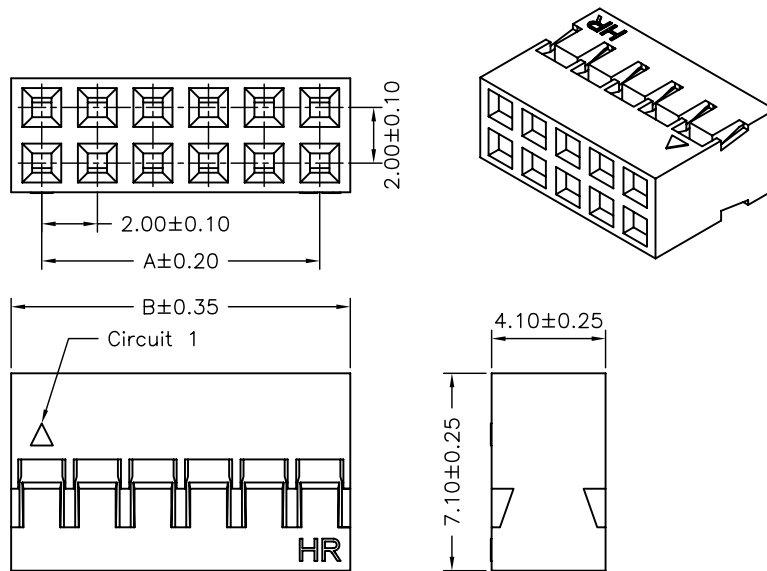

SPECIFICATIONS

Current Rating: 2A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 1000V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Black

				UNIT	SCALE	SHEET	TITLE:
				mm		1 of 1	
				DRAWN BY	APPROVED BY		
				董正一	董正一		
				2001.02.01	2001.02.01		
				GENERAL TOLERANCE			
B1	REVISE	2006.06.14	X.X±0.25	ANGLE±		2.00mm PITCH DUAL ROW HOUSING	
B0	NEW RELEASE	2005.11.25	X.XX±0.15				
REV.	DESCRIPTION	DATE	X.XXX±0.05				
						DRAW NO. :	REV.
						A2016H-2XNP	B1