

P/N LEGEND





C6350	WV-F-XP	MVO
①	② ③ ④	⑤
① Series No.	② Connector type: WV=Vertical	③ Mounting type: F=With foot
④ No. of circuits	⑤ MVO=M type, Nylon 66,UL94V-0, White	

SPECIFICATIONS

Current Rating: 15A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 3.5mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 2900V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-0
 Color: White

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
C6350WV-F-02PMVO	6.35	13.97
C6350WV-F-03PMVO	12.70	20.32
C6350WV-F-04PMVO	19.05	26.67
C6350WV-F-05PMVO	25.40	33.02
C6350WV-F-06PMVO	31.75	39.37
C6350WV-F-08PMVO	44.45	52.07

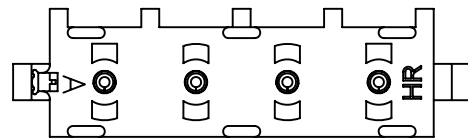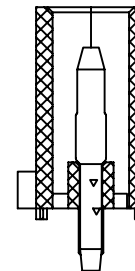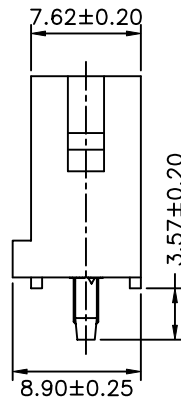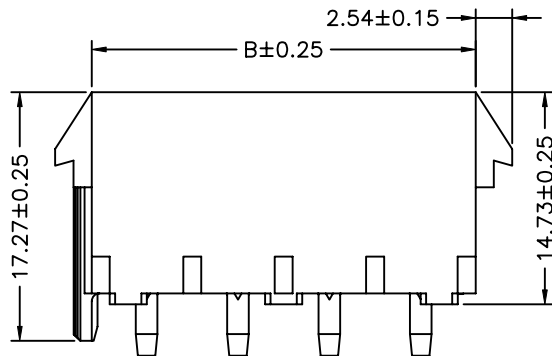

				UNIT	SCALE	SHEET	TITLE:
				mm	1 : 1	1 of 1	
A2 EN1703020002 2017.03.13 賴永強 A1 REVISE 2007.09.14 歐陽小強 A0 NEW RELEASE 2006.02.25 李勤 REV. DESCRIPTION DATE NAME				DRAWN BY	APPROVED BY	6.35mm PITCH 180° SINGLE ROW WAFER, POLARIZING PEG, MALE TYPE	
				李勤	董正一		
GENERAL TOLERANCE X.X±0.25 X.XX±0.15 X.XXX±0.05				2006.02.25 2006.02.25 ANGLE±		DRAW NO.: C6350WV-F-XP MVO REV. A2	